


General Info

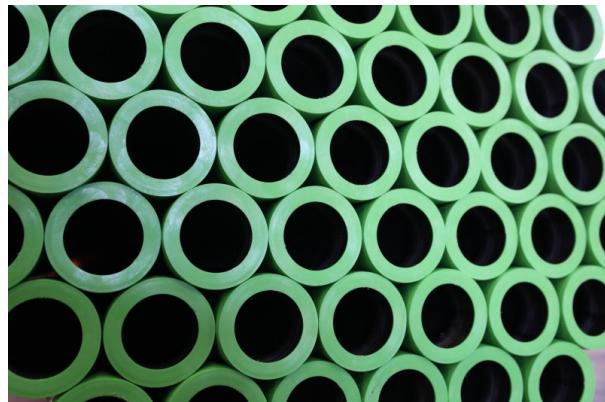

ID	#6
Product Name	FIREIST+® Fire Sprinkler Pipes
Slogan	With the quality and dedication to meet the needs of our business partners in the best way
Description	Premium epoxy-coated Firesist+ pipes are certified as corrosion resistance category C4-M and proven to exhibit outstanding mechanical performance by European independent third-party testing laboratories. They are suitable for difficult environmental conditions and ideal for continuous operation up to 98 °C. Firesist+ pipes are specially developed with ease of on-site use in mind. They allow regrooving with no flaking or peeling on pipe ends. The coating color and texture are not visually affected by heat during cutting and drilling.
Category	Water

Product Info

Sizes

Outside Diameter
21,3 mm - 323,9 mm
1/2" - 12,751"

Wall Thickness
2,0 mm - 12,70 mm
0,079" - 0,500"

Technical Specifications

- Superior epoxy coating up to 250 microns
- Corrosivity category C4-M certified
- DEKRA certified
- Available in Gray (RAL 7012)
- Roll grooved, Threaded & Coupled or Beveled pipe end
- Eliminates field painting
- Widest range of UL and FM approval, CE certified
- Produced according to ASTM and EN standards
- Pressure ratings exceeding 300 psi
- Size range between 1/2" -12"
- Reliable in all sizes
- Inner weld seam removal and custom length upon request
- Tight tolerances, consistent roundness and straightness

EN UL & FM

Image not found or type unknown



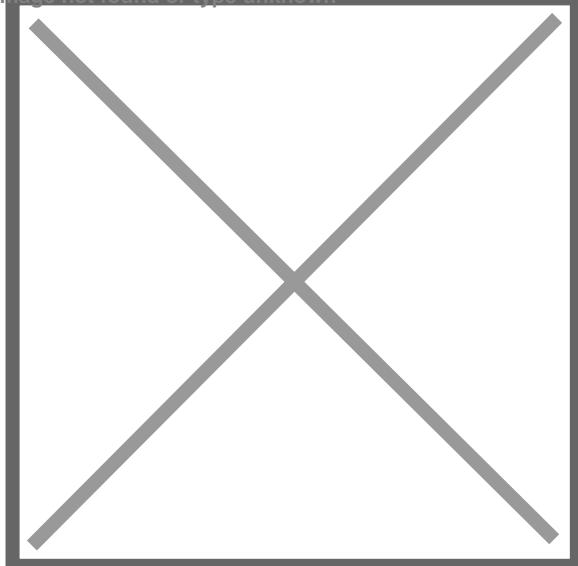


Image not found or type unknown

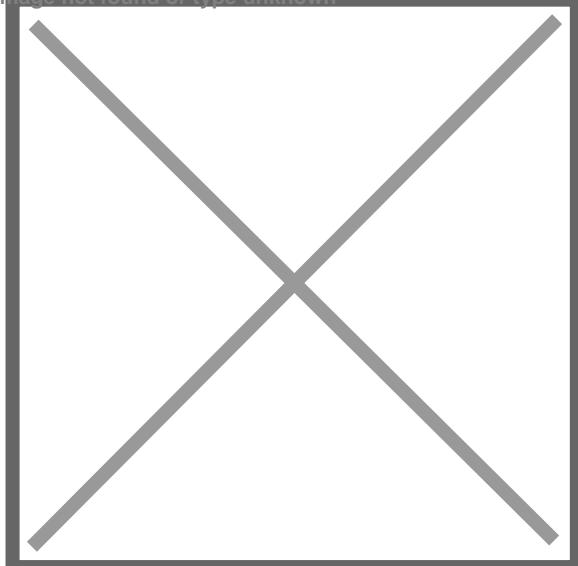

CORROSION RESISTANCE

Image not found or type unknown

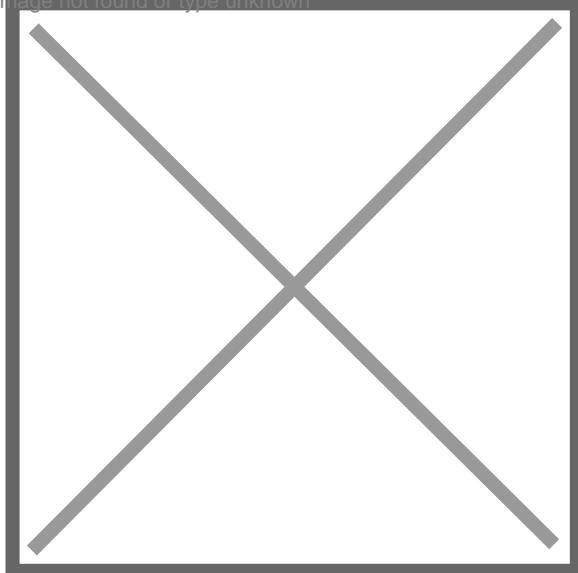

MECHANICAL PERFORMANCE

Image not found or type unknown

