

General Info



ID	#7
Product Name	FIRESIST® Fire Sprinkler Pipes
Slogan	With the quality and dedication to meet the needs of our business partners in the best way
Description	<p>FIRESIST EPOXY COATED SPRINKLER PIPES Epoxy coated Firesist pipes are certified as corrosion resistance category C3-High and proven to exhibit great mechanical performance by European independent third-party testing laboratories. Firesist pipes are in-line with global BPA regulations and suitable for use in harsh industrial conditions with low-to-moderate salt impact.</p> <p>FIRESIST PRIMER VARNISHED SPRINKLER PIPES Primer varnished sprinkler pipes provide protection against corrosion with low overhead cost.</p>
Category	Water

Product Info

Sizes

Outside Diameter
21,3 mm - 323,9 mm
1/2" - 12,751"

Wall Thickness
2,0 mm - 12,70 mm
0,079" - 0,500"

Technical Specifications

- **FM approved**
- **UL/C-UL Listed**
- **NFS certified**
- **Tight tolerances**
- **Consistent wall thickness, straightness, roundness**
- **CE, PED certified**
- **Pressure tested**
- **Reliable high steel quality**
- **Galvanised sandblasted varnished coated black, red (RAL 3000, RAL 3002, RAL 3009) or grey (RAL 7012)**
- **Plain Ends, Grooved or Threaded & Coupled**
- **Custom length availability**

EN FM & UL

Image not found or type unknown

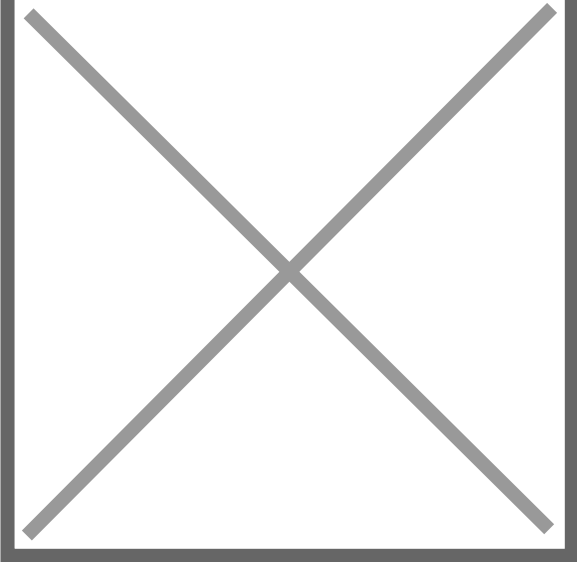


Image not found or type unknown


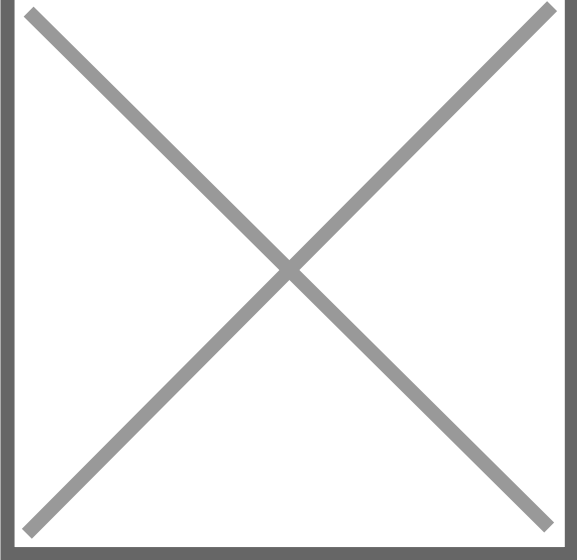


Image not found or type unknown



ASTM FM & UL

Image not found or type unknown

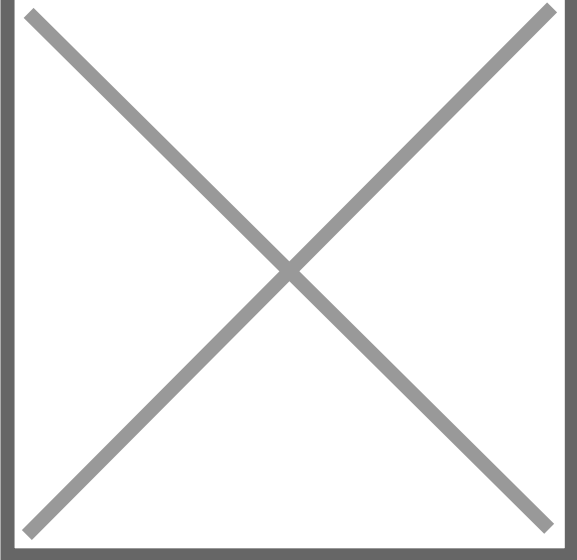